

- Installation -

【 Part # 】 : 429 540 AT

【 Make: Model 】 : Mazda:ND5RC [Miata MX-5]

【 Description 】 : Strut Bar

【 Position 】 : Front(Oval shape)

【 Part List 】 : M8 flange nuts·····2

M8 washers·····2

M16 × 15 flange bolts·····2

Caution : Vehicles without OEM strut bars will require the following OEM parts.


Part	Number	QT
Air-Cowl Box Panel	N244 56 35X	1




【 Installation 】

◆ If OEM strut bars are NOT equipped, follow the steps 1 - 5 below.



- ① Remove Wipers.
- ② Remove Washer hoses.
- ③ Remove 2 clips then the plastic panel. (shown below)

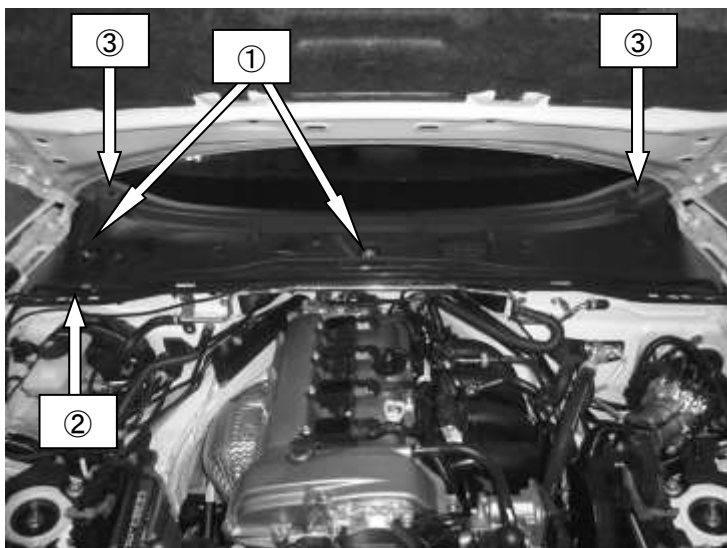



- ④ Remove 8 bolts then replace the plastic panel. (shown below)
- ⑤ Remove ①~③ steps to reinstall the plastic panel.

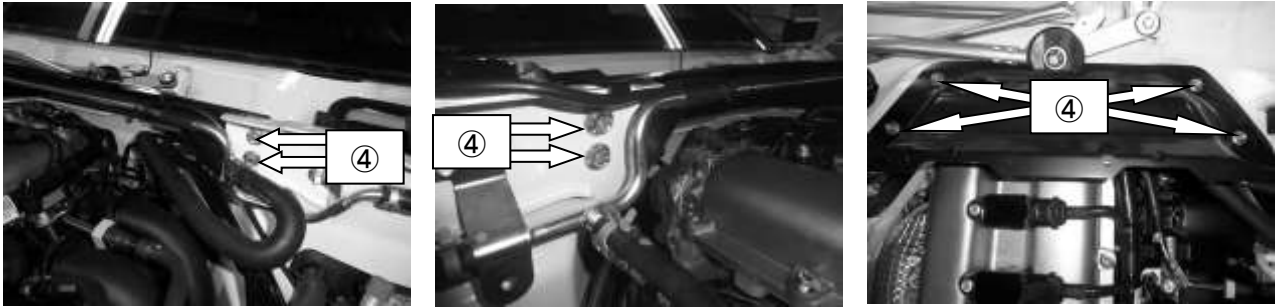

- ⑥ Remove both Left and Right upper mounts nuts. (shown below, #6)
- ⑦ Remove 2 nuts from Passenger side ABS module bracket, 1 nut from DCDC converter bracket, harness holder clip, then the strut bar bracket. (shown below, #7)
- (※Keep the removed passenger side strut bar bracket)
- ⑧ Remove 1 bolt from Driver side PCM bracket, 2 nuts, then the strut bar. (shown below, #8)
- (※Keep the removed driver side strut bar bracket)

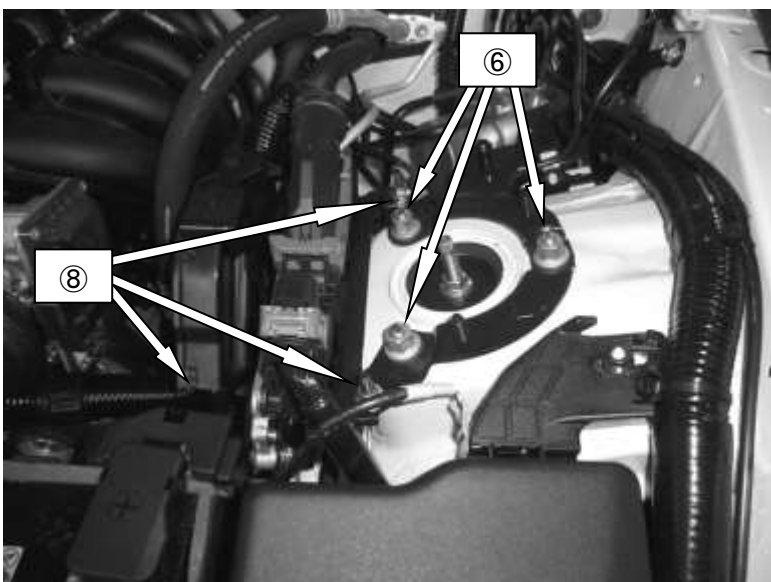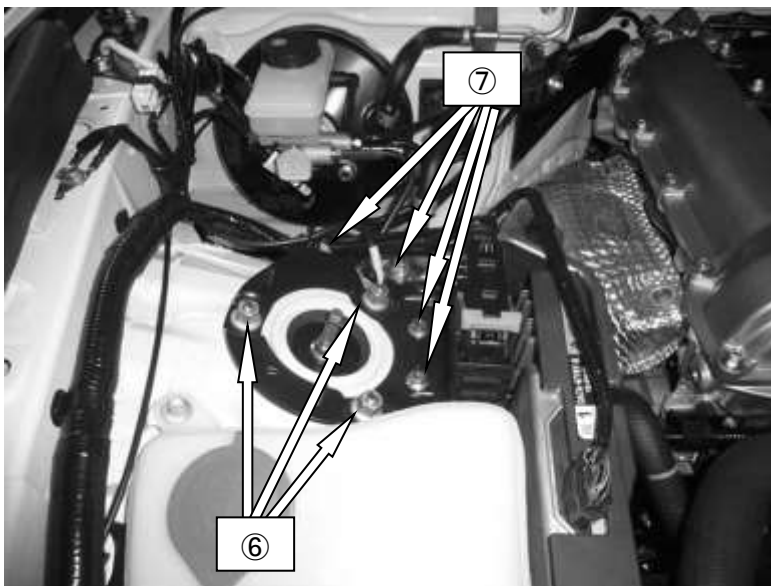

- ⑨ Install CUSCO Front Strut Bar with OEM bolts, nuts and supplied bolts, nuts, and washers.
- ⑩ Reinstall the harness clip removed at step #⑦.

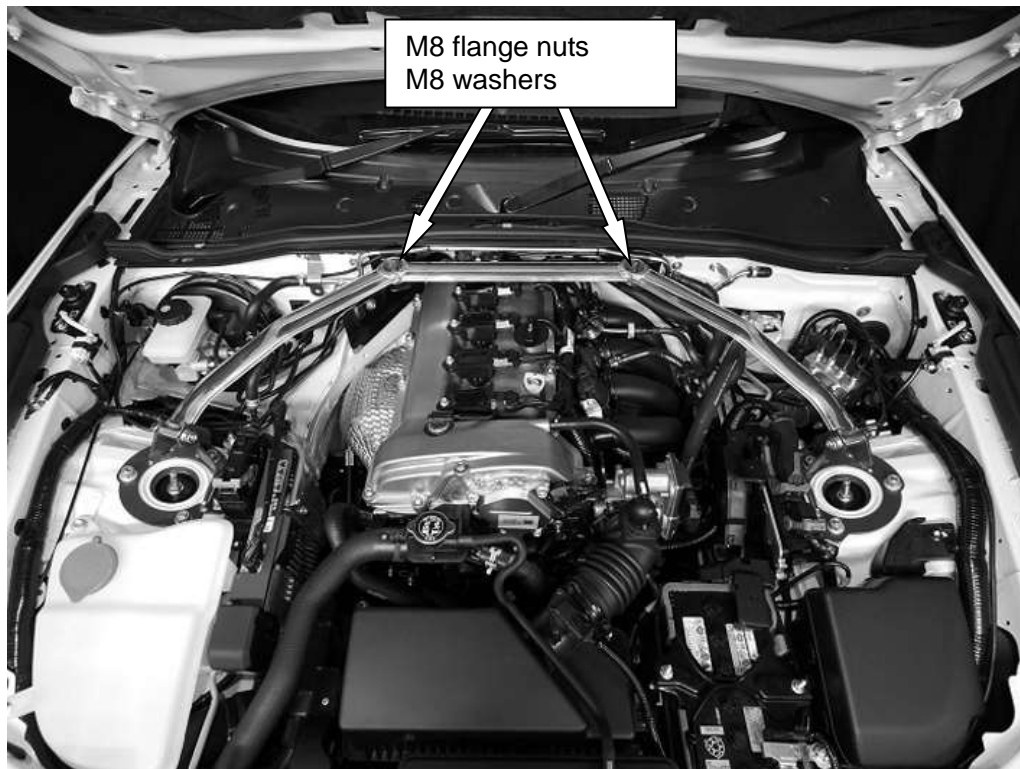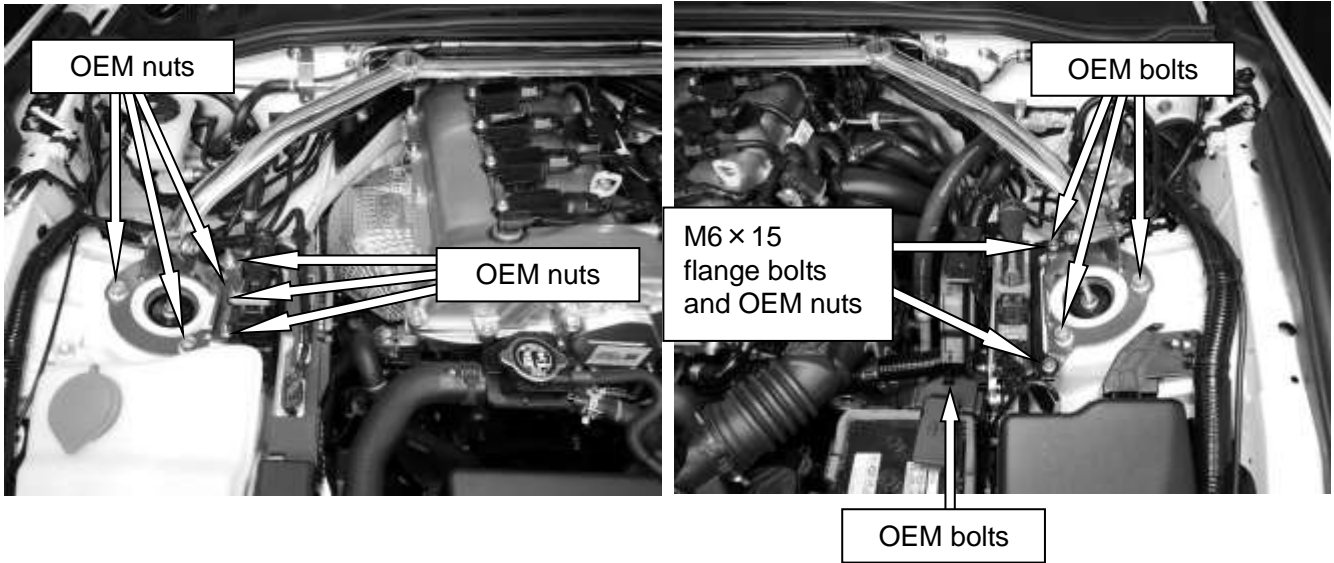

PERIODICALLU RE-TORQUE ALL BOLTS AND NUTS.